

## RFP 2017-10 EDISTO BEACH SAND FENCE AND DUNE PLANTING PROJECT

### ADDENDUM NO.1

- Contractor Shall Submit:
  - ✓ Delivery schedule of plants
  - ✓ Certificates for plants including cultivar name, genetic purity, and location of collection for transplanted stock.
  - ✓ Fertilizers including manufacturers chemical analysis and application instructions.
- Plants shall be protected from exposure to wind and direct sunlight during delivery to prevent desiccation, internal heat buildup or contamination.
- Plants shall be inspected by the Engineer upon arrival at the job site for conformity to cultivar, genetic purity and quality requirements. Unacceptable materials (e.g. desiccated, diseased, insect-infected, lack of root biomass) shall be removed from the job site at no additional cost to the owner.
- Plants shall be stored in designated areas and covered with moist burlap, straw, or other covering. Covering shall allow air to circulate preventing internal heat from building up. Plants shall be protected from exposure to wind and direct sunlight until installed.
- Plants shall be damaged during handling. Except for bulk deliveries, material shall not be dropped or dumped from vehicles.
- Plants shall be installed within 24 hours of delivery if possible, or if not installed on the day of delivery, all stock shall be covered in straw, moist burlap, or other material as approved by the Engineer, until the time of installation which shall be no longer than 3 days. If the planting site size is too large for this time restriction, staged shipments and subsequent planting will be allowed.
- Contractor shall define areas for planting using stakes and string lines. Staked areas shall be approved by the Engineer.
- All planting to be performed by hand. Each species to be installed as follows:
  - Sea Oats-install to a depth of 8-10 inches or supplier recommendation
  - Bitter Panicum-install to a depth of 6 inches or supplier recommendation
- **Replace the first sentence of Fertilizer in original bid with this sentence.** Simultaneous with the planting, each plant shall be fertilized with 30 grams of 3- to 4-month slow release mixture 19-8-5.

### TIMBER CONSTRUCTION

- Store timber and lumber on the site in piles. Open stack untreated material on suitable skids at least 12 inches above the ground, and pile to shed water and prevent warping. Clear ground beneath and in the vicinity of all such piles of weeds, rubbish, and combustible materials. Where

required, all material shall be protected from weather by suitable covering. Material cannot be stored on the beach.

- Timber posts shall be 3" round timber posts. Timber posts can also be landscape timbers round with 2 flat sides.

See Site plan attached separately.

**TOWN OF EDISTO BEACH  
CERTIFICATE OF INSURANCE REQUEST**

In accordance with your agreement with the Town of Edisto Beach, a Certificate of Insurance evidencing the below referenced coverages is to be submitted to the Town of Edisto Beach prior to any services being performed.

The Certificate of Insurance must evidence the following coverages, and/or terms and conditions (these are minimum requirements) as marked below:

Provide a Cancellation Clause giving 30 days prior written notice in the event of cancellation, non-renewal or material change in policy.

Name the Town of Edisto Beach as Additional Insured.

An Insurance Company Rating Classification of A+, A or A- (Excellent) with financial assets of at least \$100 million.

**General Liability** – Commercial General Liability Limit for bodily injury, personal injury and property damage \$1,000,000 per occurrence; \$2,000,000 aggregate other than products/completed operations. \$2,000,000 aggregate for products/completed operations.

**Workers' Compensation and Employers' Liability** – Workers' Compensation limits as required by the laws of the State of South Carolina and Employers' Liability limits of \$100,000 per accident.

**Automobile Liability** – \$1,000,000 combined single limit per accident for bodily injury and property damage.

**Umbrella Liability** – Combined Single Limit for bodily Injury, Property Damage, Personal & Advertising Injury of \$5,000,000 including Products/Completed Operations and Contractual.

**Professional Liability** – Limit of Liability per claim \$1,000,000.





Certificate Holder should read:

**Town of Edisto Beach, 2414 Murray Street, Edisto Beach, SC 29438**

Please have your insurance company e-mail Certificate of Insurance to the attention of:

Maxine Burton, Budget/Financial Analyst @  
mburton@townofedistobeach.com  
or fax to  
843-869-3855

And follow with original via mail to same at:  
Town of Edisto Beach, 2414 Murray Street, Edisto Beach, SC 29438

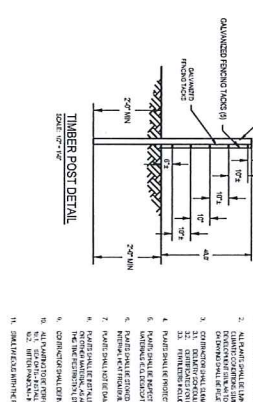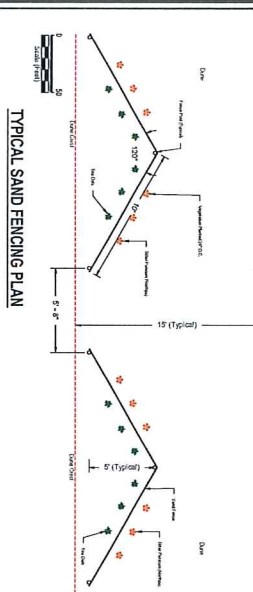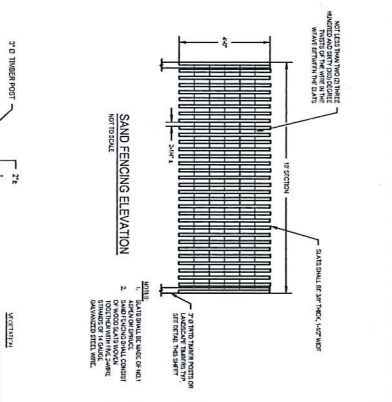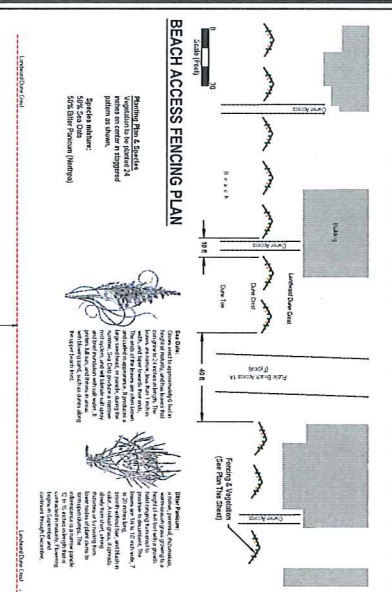

**NOTES:**

1. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
2. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
3. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
4. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
5. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
6. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
7. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
8. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
9. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
10. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
11. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
12. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
13. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
14. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.
15. SAND FENCING SHALL BE 10' HIGH AND SHALL BE 10' WIDE.

**REVISIONS:**

1. DATE: 27 MAR 2017
2. DATE: 27 MAR 2017
3. DATE: 27 MAR 2017
4. DATE: 27 MAR 2017
5. DATE: 27 MAR 2017
6. DATE: 27 MAR 2017
7. DATE: 27 MAR 2017
8. DATE: 27 MAR 2017
9. DATE: 27 MAR 2017
10. DATE: 27 MAR 2017
11. DATE: 27 MAR 2017
12. DATE: 27 MAR 2017
13. DATE: 27 MAR 2017
14. DATE: 27 MAR 2017
15. DATE: 27 MAR 2017

	<b>CLIENT</b> Town of Edisto Beach 2414 Murray St Edisto Island, SC 29438	<b>PROJECT</b> EDISTO BEACH SAND FENCING PROJECT	<b>DRAWING TITLE</b> SAND FENCING PLAN & DETAILS	<b>SCALE</b> AS SHOWN	<b>DATE</b> 27 MAR 2017	<b>SCALE</b> AS SHOWN	<b>DATE</b> 27 MAR 2017	<b>SCALE</b> AS SHOWN	<b>DATE</b> 27 MAR 2017
	<b>PROJECT #</b> 2016	<b>APPROVED BY</b> H.K. SIBERT	<b>DATE</b> 27 MAR 2017	<b>SCALE</b> AS SHOWN	<b>DATE</b> 27 MAR 2017	<b>SCALE</b> AS SHOWN	<b>DATE</b> 27 MAR 2017	<b>SCALE</b> AS SHOWN	<b>DATE</b> 27 MAR 2017